
TABLE 1: ELECTRICAL SPECIFICATIONS AT 25 °C

SWITCHING TRANSFORMER DESIGNED FOR USE WITH POWER INTEGRATIONS TOP222Y. REFER TO APPLICATION CIRCUIT OF FIGURE 3.

PARAMETER	S MIN.	PEC LIMIT TYP.	S MAX.	UNITS
PRIMARY INDUCTANCE (2-1) VOLTAGE = 0.250Vrms FREQUENCY = 100 KHZ	1962	2179	2196	μΗΥ
TURN RATIO'S: SEC (7-8) : PRIMARY (2-1) BIAS (4-3) : PRIMARY (2-1)		1: 2.5 1: 10.0		<u>+</u> 4% <u>+</u> 4%
PRI LEAKAGE IND. (SEC SHORTED) VOLTAGE = 0.250Vrms FREQUENCY = 100 KHZ			44.0	μHY
HIPOT: PRIMARY TO SECONDARY BIAS TO SECONDARY	3000 3000			Vrms Vrms
APP CIRCUIT PARAMETERS: (1) AC LINE VOLTAGE 47/400 Hz OUTPUT VOLTAGE OUTPUT CURRENT CONTINUOUS OUTPUT CURRENT PEAK LINE REGULATION (85 TO 265Vac) LOAD REGULATION 10-100% RIPPLE	85 0.0 	48.0 0.20 0.20 50.0	265 .250 .330 	Vac Vdc Amps Amps <u>+</u> % <u>+</u> % <u>+</u> %



NOTE1:

REINFORCED INSULATION, UL1950, IEC950, CSA-950: A)ALL MATERIALS MEET "UL", "CSA" & "IEC" REQUIREMENTS B)ALL MATERIALS RATED 130 °C (CLASS B) OR BETTER. C)DESIGNED FOR >6.2mm CREEPAGE REQUIREMENTS. D)VARNISH FINISHED ASSEMBLY.

(1) REFER TO RD5 APPLICATION CIRCUIT OF FIGURE 3.



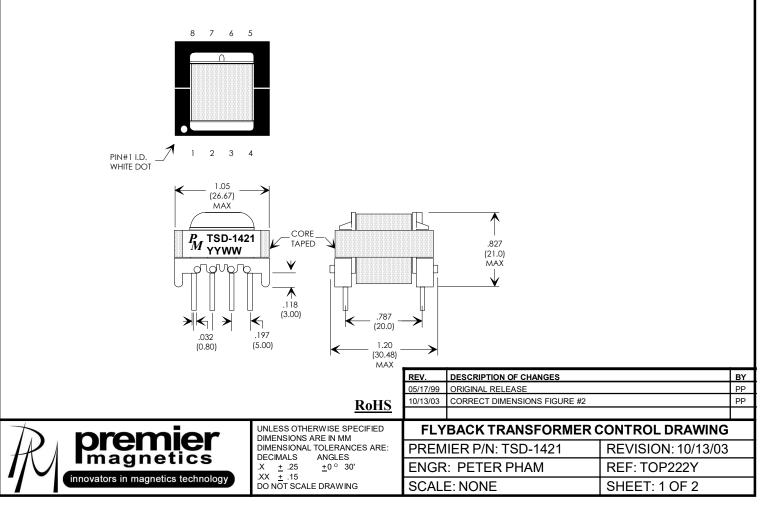


FIGURE 1: SCHEMATIC DIAGRAM

APPLICATION NOTES

Premier Magnetics' TSD-1421 Switch Mode Transformer was designed for use with Power Integrations, Inc. PWR-TOP222Y three terminal off-line PWM switching regulator in the Flyback Buck-Boost circuit configuration. This conversion topology can provide isolated multiple outputs with efficiencies up to 90%. Premiers' TSD-1421 transformer has been optimized to provide maximum power throughput.

The TOPSwitch-II series from Power Integrations, Inc. are self contained 100KHz three terminal voltage controlled PWM switching regulators. This series contains all necessary functions for an off-line switched mode control DC power source. These switching regulators provide a very simple solution to off-line designs. The inductors and transformer used with the TOPXXX are critical to the performance of the circuit. They define the overall efficiency, output power and overall physical size.

Below is a universal input high precision 12 watt application circuit utilizing Power Integrations TOP222 switching regulator in the flyback buck-boost configuration. The component values listed are intended for reference purposes only. Please refer to Power Integrations application notes for the RD5 demo board for more information.

FIGURE 3: TYPICAL APPLICATION CIRCUIT

