

TABLE 1: ELECTRICAL SPECIFICATIONS AT 25 °C

PARAMETER	SPEC LIMITS			UNITS
	MIN.	TYP.	MAX.	
INDUCTANCE: V=1Vrms, F=10kHz FL1-FL2	792	880	968	μH

FIGURE 1: SCHEMATIC DIAGRAM





FIGURE 2: PHYSICAL DIMENSIONS IN mm

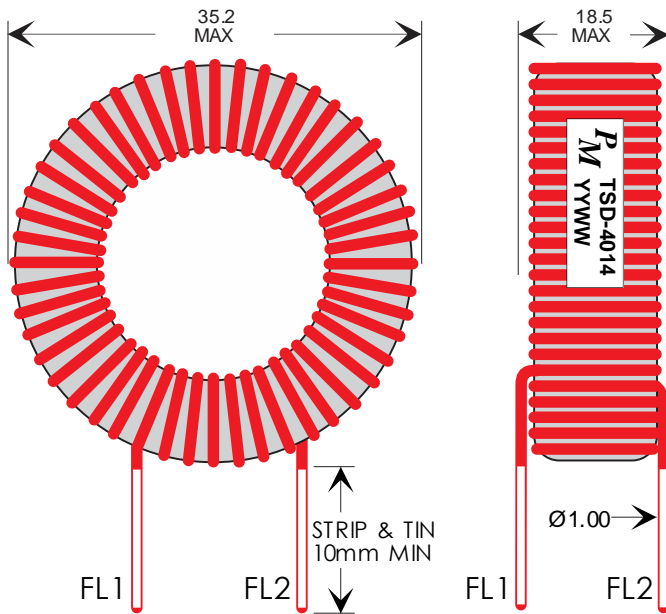

NOTES:

- 1) All materials comply with Insulation System Class F.
- 2) All units comply with the requirements of EU RoHS Directive.
- 3) All materials per Premier Magnetics UL file #E177139.

RoHS



UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN mm
DIMENSIONAL TOLERANCES ARE:
DECIMALS ANGLES
.X ±.4 ± 0° 30'
.XX ±.30
DO NOT SCALE DRAWING

CHOKE INDUCTOR CONTROL DRAWING

PREMIER P/N: TSD-4014	REVISION: 12/13/17
ENGR: RISHA PADILLA	REF: L4, DER-484
APPROVED: PETER PHAM	SHEET: 1 OF 1